


A019 Street Lamp Distribution box Low voltage

用途 Application

适用于配电系统，广泛应用于机场、高速公路、隧道、桥梁、道路和住宅小区等照明配电工程。

Suitable for distribution system, widely used in airport, highway, tunnel, bridges, roads and residential areas such as lighting distribution engineering.

型号规格说明 Model Specifications

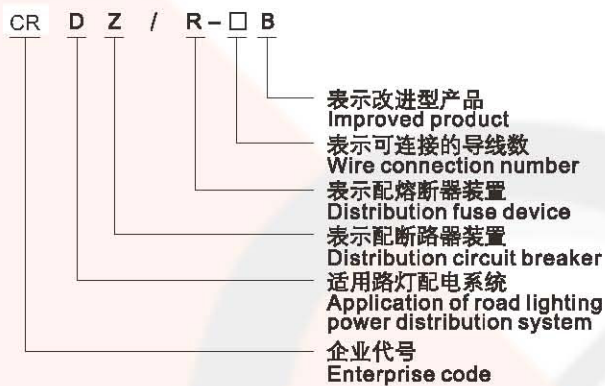

技术参数 Technical Parameters

- 1、电压范围 Voltage range: $\leq 500V$
- 2、工频耐压 Frequency withstand voltage: $\geq 2500V/60s$
- 3、额定电流 Rated current: 150A

选型 Model Selection

型号 Type	长×宽×高 Length×width×height
CRDZ-4	225×88×90
CRDR-4B	225×88×90
CRDR-4	225×95×80
CRDR-2	146×85×80

安装说明 Installation Instructions

打开盒盖，将内六角螺栓旋松，把三相四线电源进线与出线头的绝缘层剥去35mm左右，塞进电源进出线孔，旋紧螺栓，把断路器或熔断器出线端与路灯导线连接，合上盒盖。

Open the cover, loosened the inner six angle bolts, strip about 35mm of the three-phase four - wire power supply inlet wire and insulating layer of wire head, insert the power outlet holes, tighten the bolt, connect outlet terminal of the circuit breaker or fuse with the lamp wire, close the lid.

安装结构图(如: CRDZ-4)

Installation structure (As:CRDZ-4)



注: CRDR-4B、CRDR-4、CRDR-2等路灯配电箱安装结构图均可参照上图。

Note: CRDR-4B, CRDR-4, CRDR-2 street lighting distribution box installation structure diagram according to the above.

