



## 常用套件组合 / Set general introduction

### HA系列3回路接插件套件 HA series 3 Poles of connector

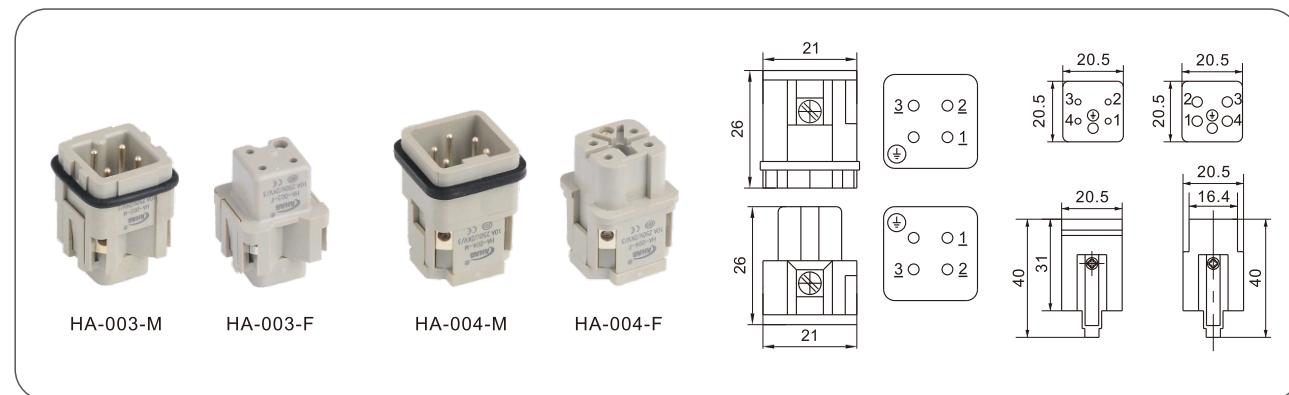


工作电流: 16A  
 工作电压: 400/500V  
 阻燃等级(据UL94): V0  
 防护等级: IP65  
 接线形式: 螺钉压接  
               弹片压接  
 电缆入口可选螺纹:  
               M20, PG11  
 Rated current: 16A  
 Rated voltage: 400/500V  
 Flammability acc. to UL94: V0  
 Degree of protection acc. to  
 DIN40 050: IP65  
 Terminal: Screw terminal  
               Spring terminal  
 Thread: M20, PG11

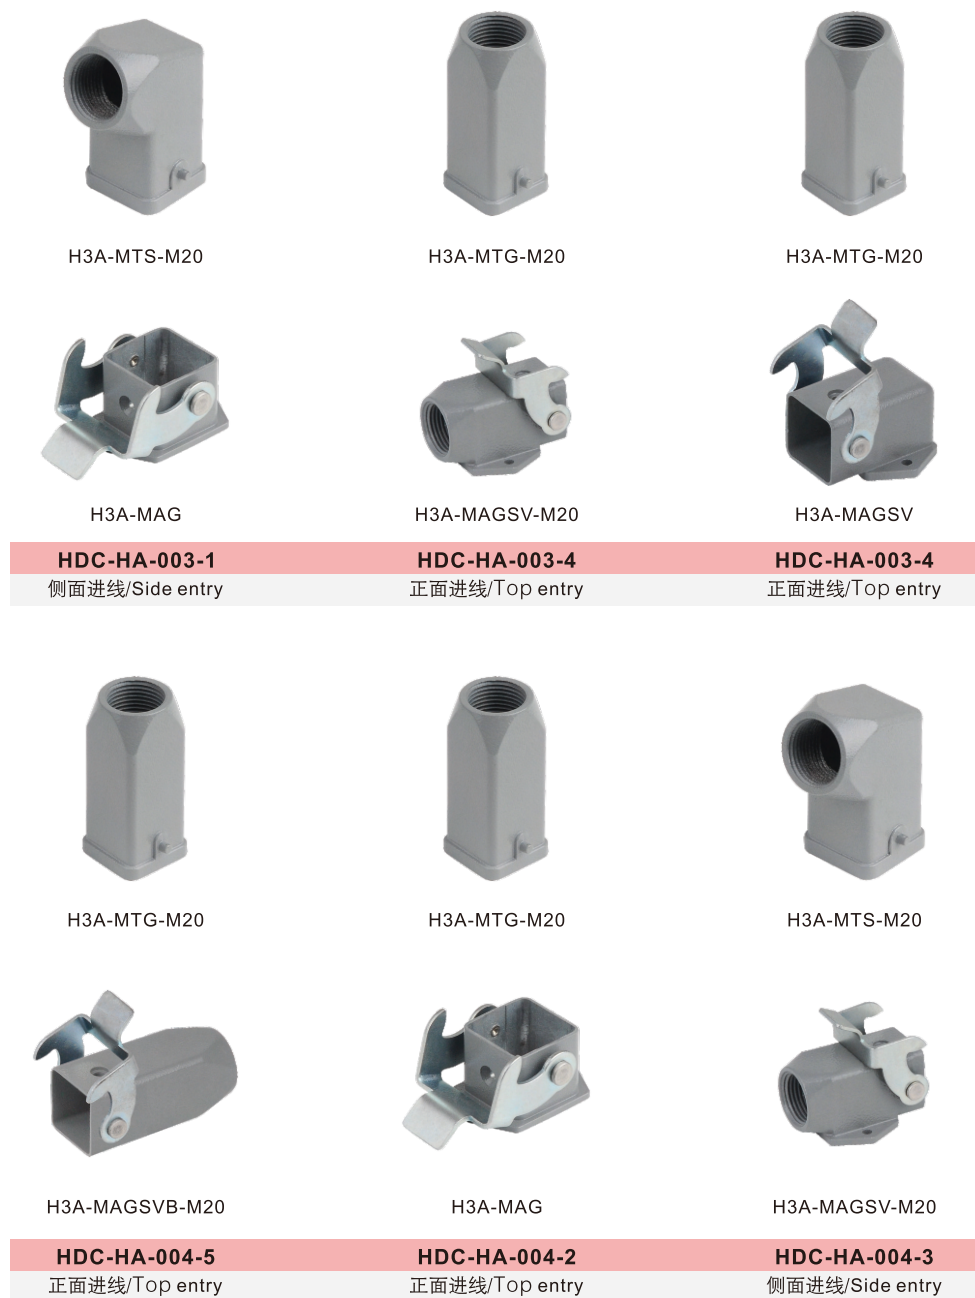


**配套外壳 / Suit hood/housing**

H3A 上壳/底座 H3A hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
外壳上壳: 侧面进线 Hood: Side entry	PG11 M20	H3A-MTS-PG11 H3A-MTS-M20	
外壳上壳: 顶部进线 Hood: Top entry	PG11 M20	H3A-MTG-PG11 H3A-MTG-M20	
H3A电缆对接下壳 H3A Cable butt-joint lower shell	PG11 M20	H3A-MAGSVB-PG11 H3A-MAGSVB-M20	
外壳底座: 开孔安装 Bulkhead: mounted			
外壳底座: 开孔安装(侧面形式) Bulkhead: mounted (side form)		H3A-MAGS	
外壳底座: 表面安装 Bulkhead: Surface mounted	PG11 M20	H3A-MAGSV-PG11 H3A-MAGSV-M20	


HA系列10回路接插件 HA series 10 Poles of connector

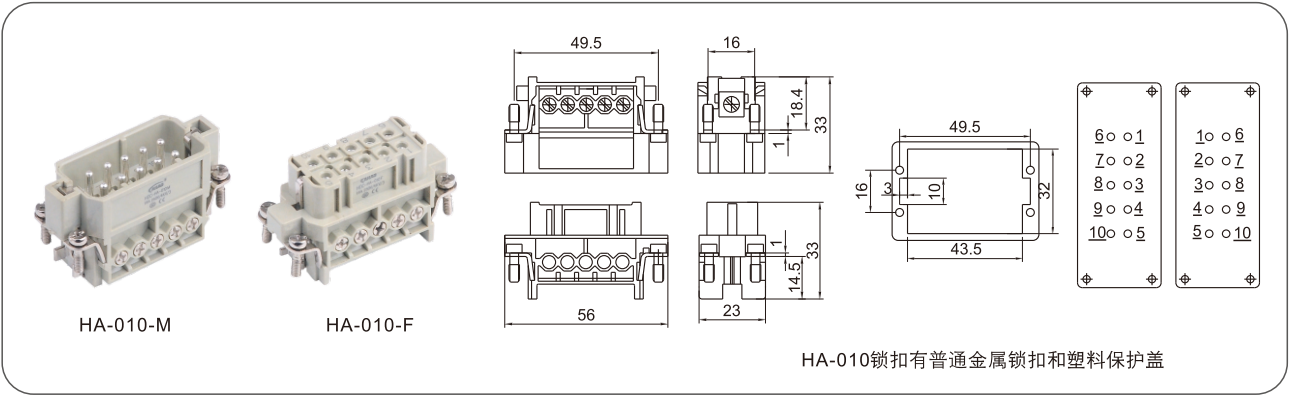


工作电流: 16A  
 工作电压: 400/500V  
 阻燃等级(据UL94): V0  
 防护等级: IP65  
 接线形式: 螺钉压接  
 弹片压接  
 电缆入口可选螺纹:  
 PG16, PG21  
 Rated current: 16A  
 Rated voltage: 400/500V  
 Flammability acc. to UL94: V0  
 Degree of protection acc. to DIN40 050: IP65  
 Terminal: Screw terminal  
 Spring terminal  
 Thread: PG16, PG21

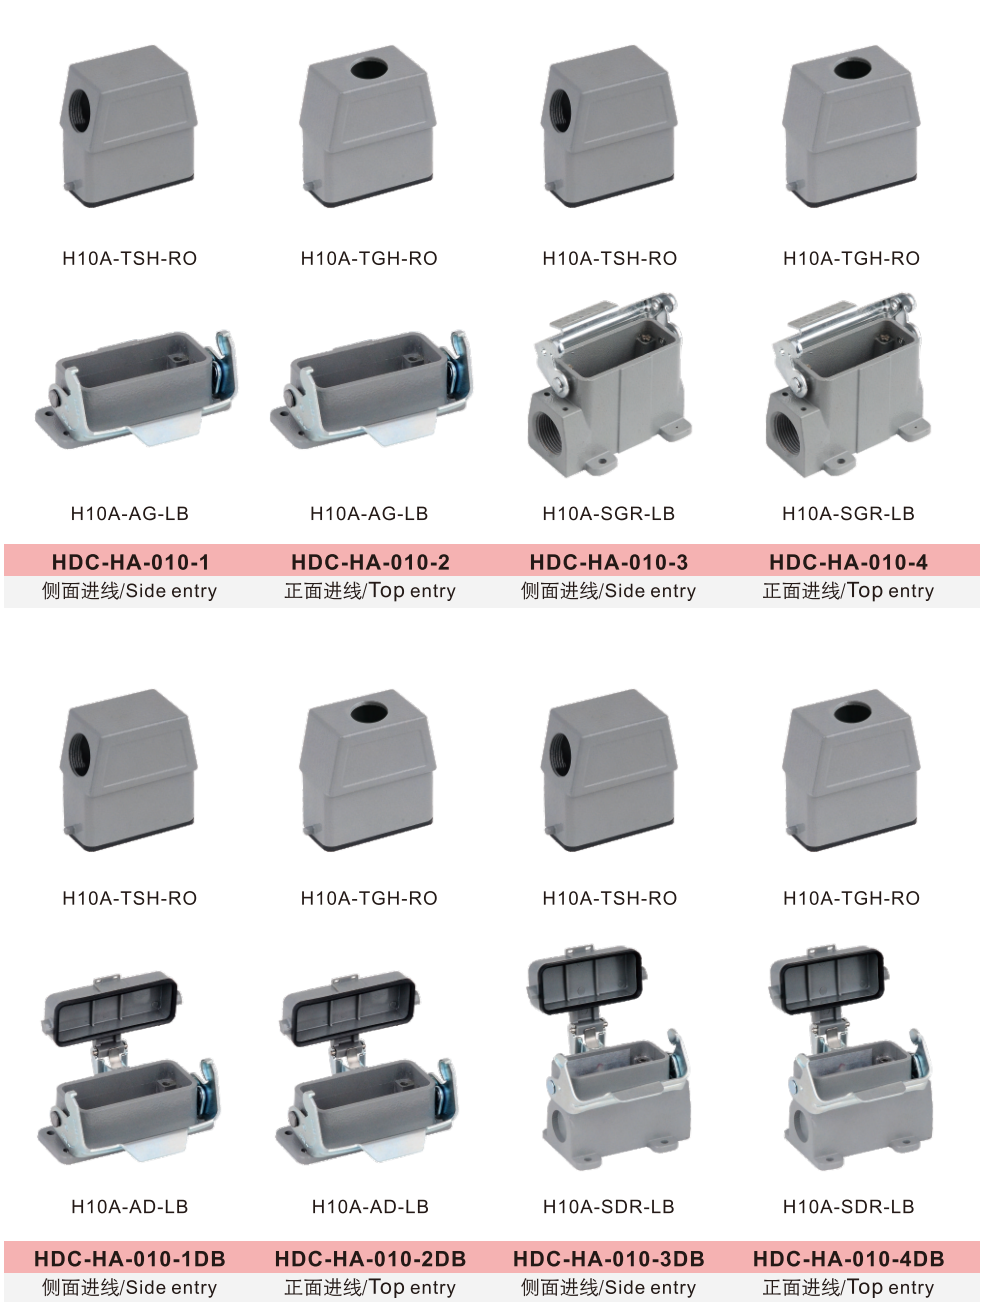


配套外壳 / Suit hood/housing

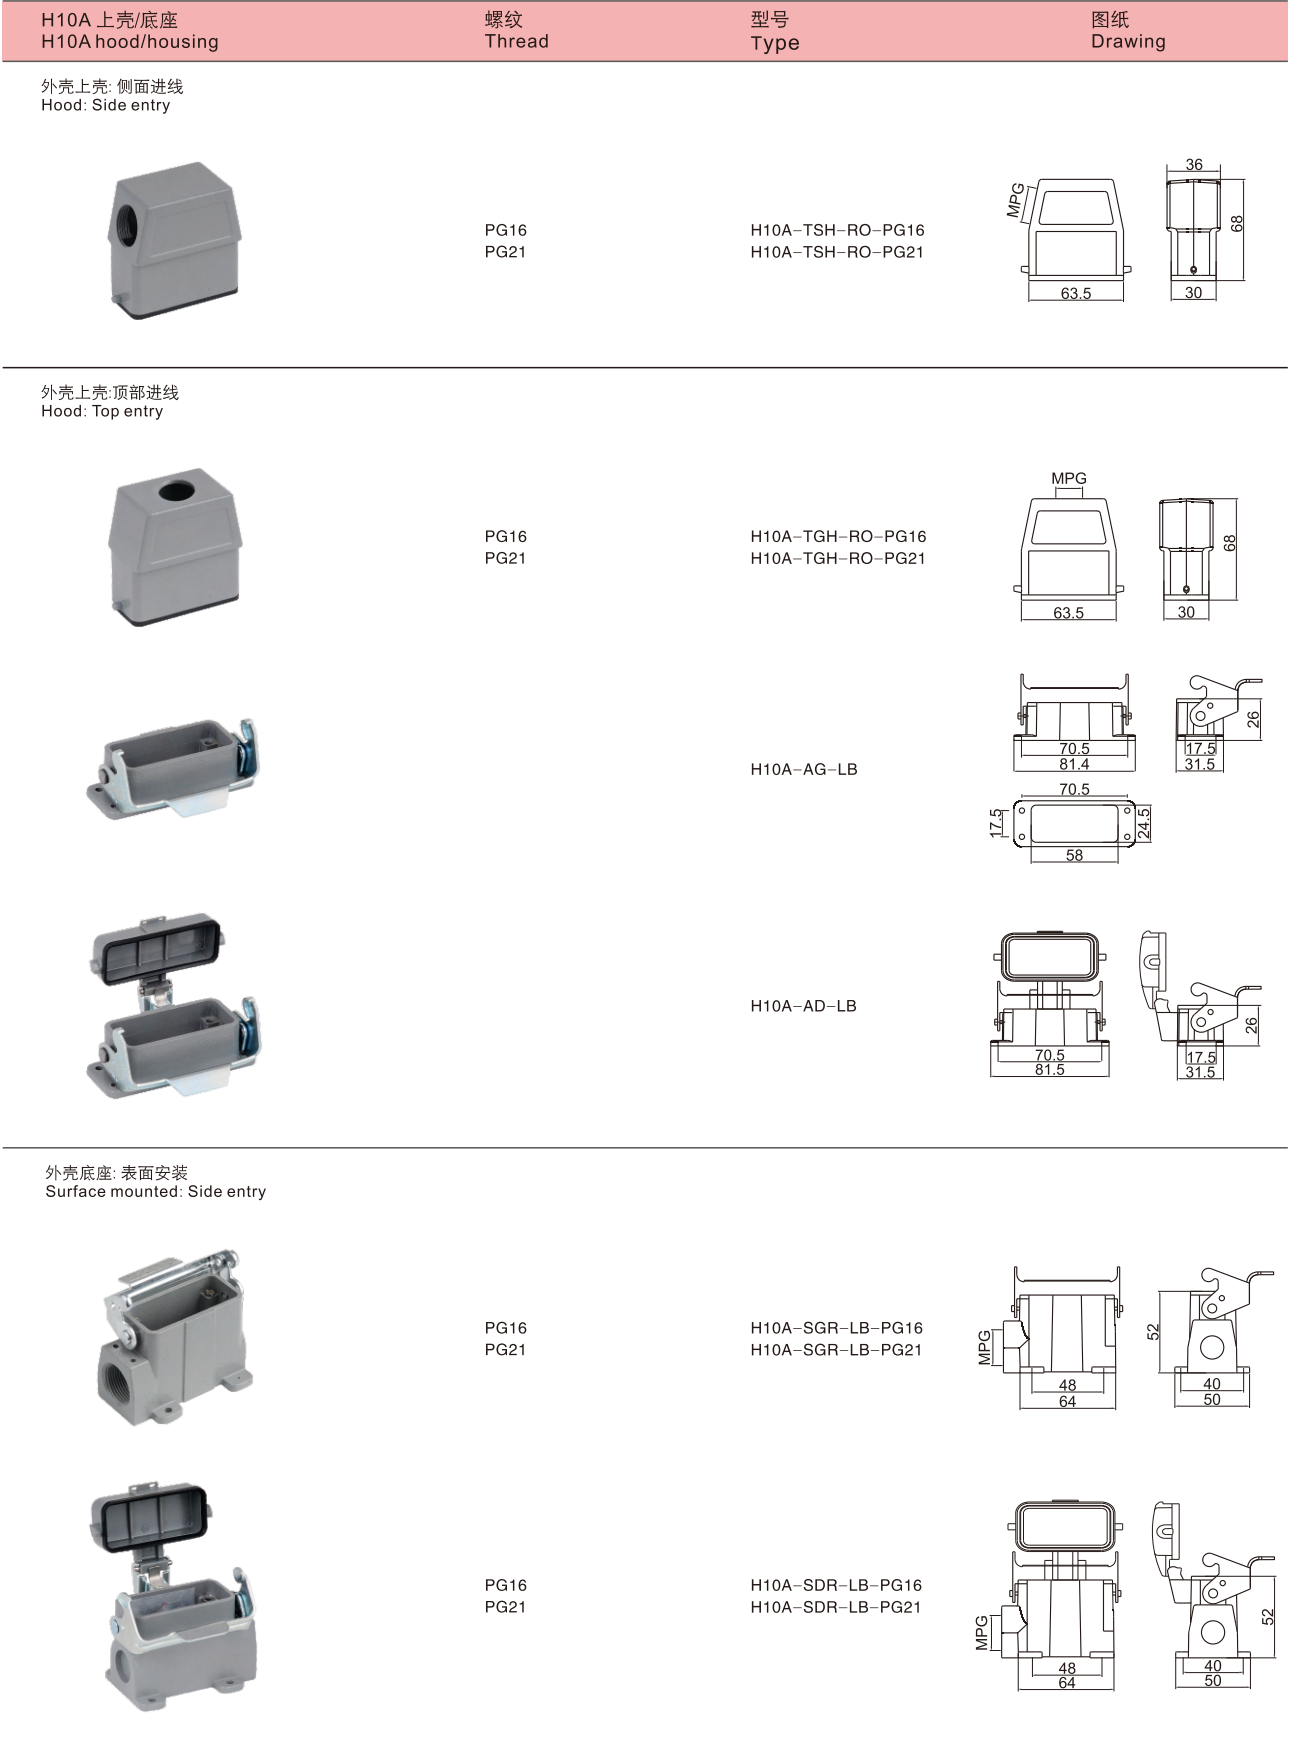

HA系列16回路接插件 HA series 16 Poles of connector

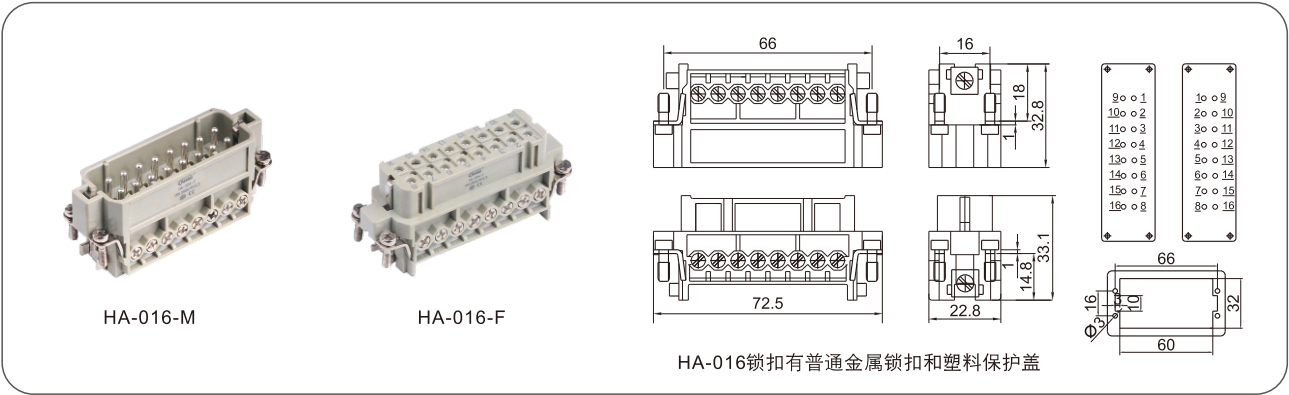

工作电流: 16A  
 工作电压: 400/500V  
 阻燃等级(据UL94): V0  
 防护等级: IP65  
 接线形式: 螺钉压接  
 弹片压接  
 冷压针压接  
 电缆入口可选螺纹:  
 PG16, PG21  
 Rated current: 16A  
 Rated voltage: 400/500V  
 Flammability acc. to UL94: V0  
 Degree of protection acc. to DIN40 050: IP65  
 Terminal: Screw terminal  
 Spring terminal  
 Crimp terminal  
 Thread: PG16, PG21

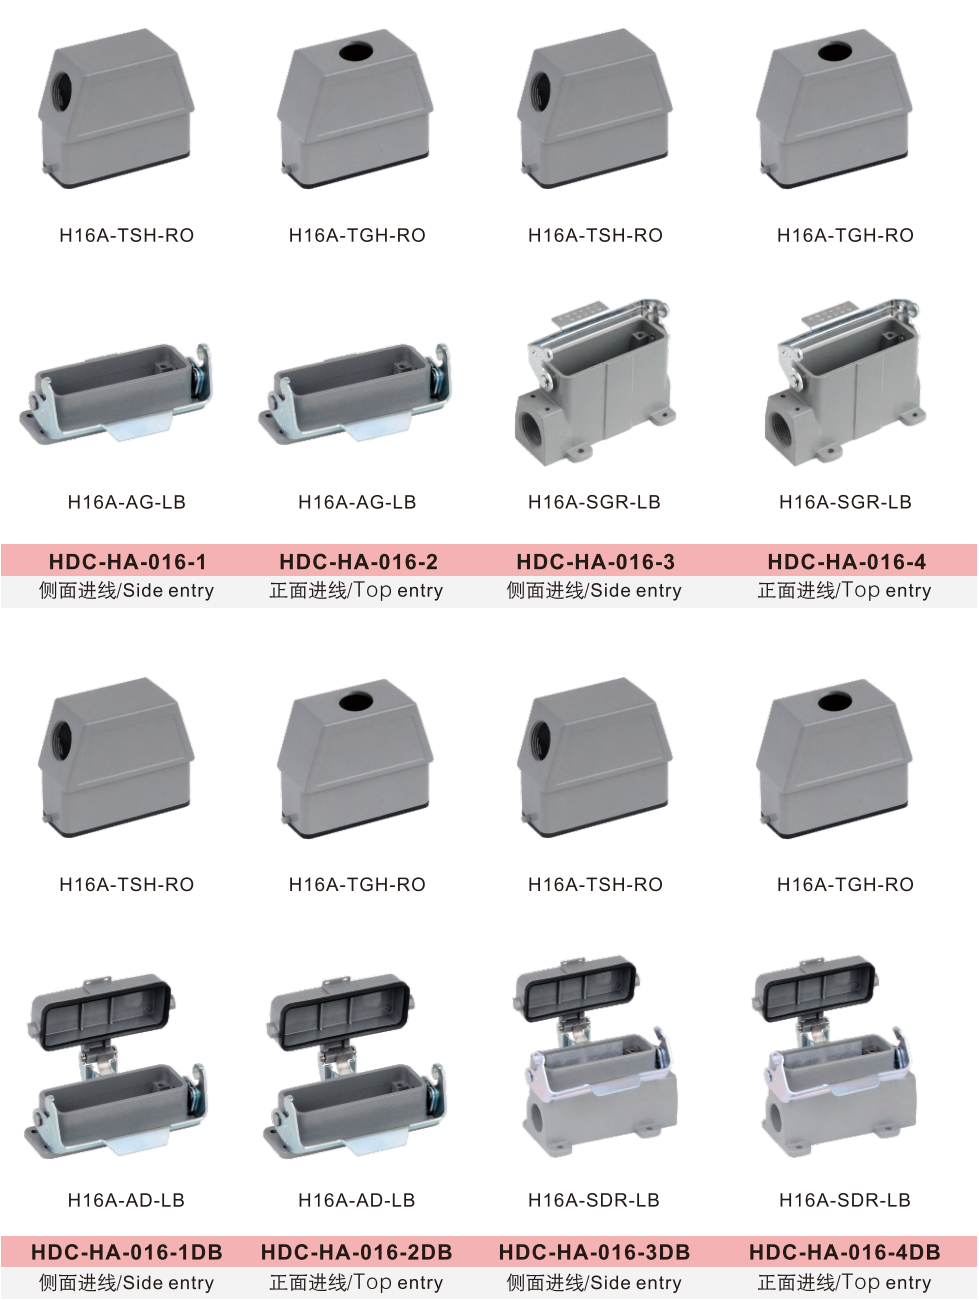


配套外壳 / Suit hood/housing

H16A 上壳/底座 H16A hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
外壳上壳: 侧面进线 Hood: Side entry			
	PG16 PG21	H16A-TSH-RO-PG16 H16A-TSH-RO-PG21	
外壳上壳: 顶部进线 Hood: Top entry			
	PG16 PG21	H16A-TGH-RO-PG16 H16A-TGH-RO-PG21	
外壳底座: 开孔安装 Bulkhead: mounted			
		H16A-AG-LB	
		H16A-AD-LB	
外壳底座: 表面安装 Surface mounted: Side entry			
	PG16 PG21	H16A-SGR-LB-PG16 H16A-SGR-LB-PG21	
	PG16 PG21	H16A-SDR-LB-PG16 H16A-SDR-LB-PG21	




常用套件组合 / Set general introduction

HA系列32回路接插件 HA series 32 Poles of connector

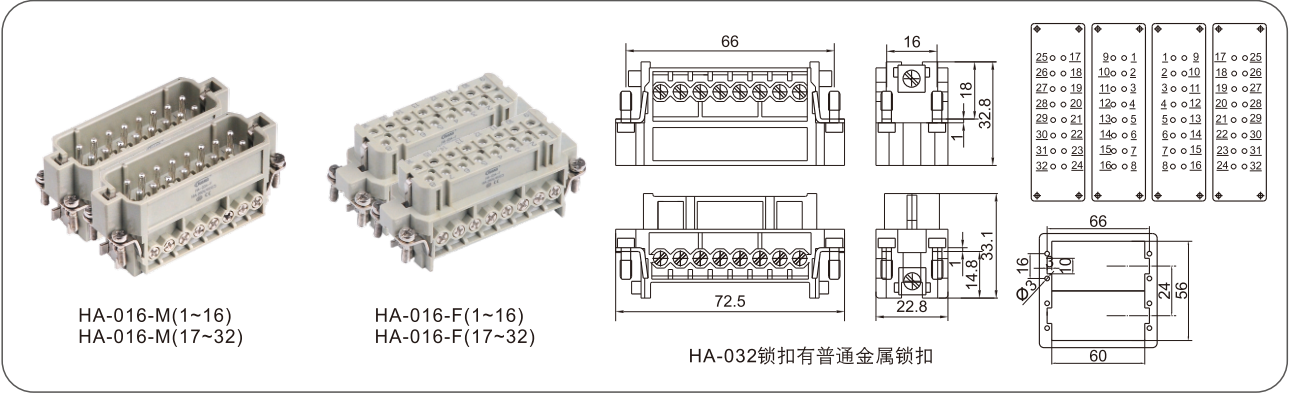


工作电流: 16A  
工作电压: 400/500V  
阻燃等级(据UL94): V0  
防护等级: IP65  
接线形式: 螺钉压接  
弹片压接  
电缆入口可选螺纹:  
PG21, PG29  
Rated current: 16A  
Rated voltage: 400/500V  
Flammability acc. to UL94: V0  
Degree of protection acc. to DIN40 050: IP65  
Terminal: Screw terminal  
Spring terminal  
Thread: PG21, PG29

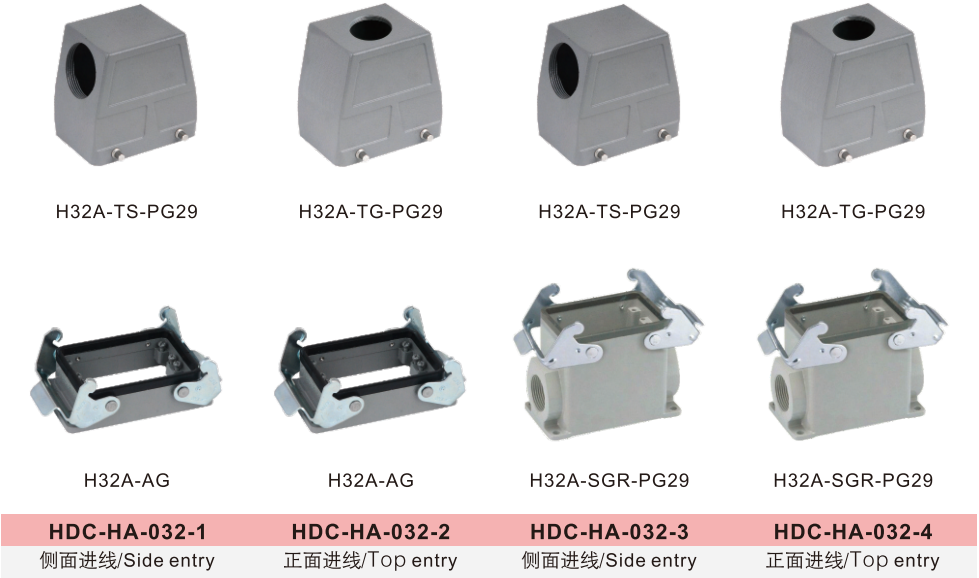


配套外壳 / Suit hood/housing

H32A 上壳 H32A hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线  
Hood: Side entry

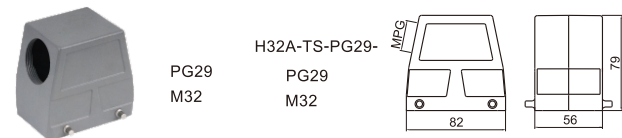


外壳上壳: 顶部进线  
Hood: Top entry

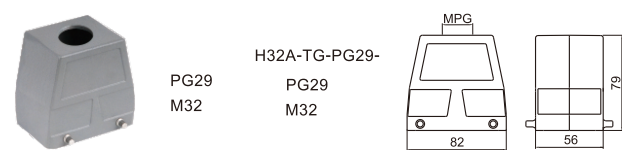


H32A 底座 H32A housing	螺纹 Thread	型号 Type	图纸 Drawing
-------------------------	--------------	------------	---------------

外壳底座: 开孔安装  
Bulkhead: mounted

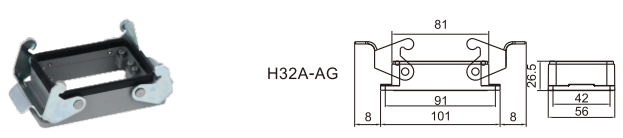

外壳底座: 表面安装  
Surface mounted: Side entry

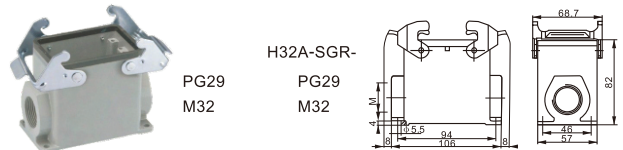

HE INSERT SERIES  
HE插体系列  
最常规的标准型产品